

(Tc = 25°C unless otherwise specified)

$V_{(BR)DSS}$	Drain-source breakdown voltage	1500	-	-	V	$V_{GS} = 0V, I_D = 100\mu A$
		2.3	2.8	3.6	V	$V_{DS} = V_{GS}, I_D = 10mA$
$V_{GS(th)}$	Gate threshold voltage	-	2.0	-	V	$V_{DS} = V_{GS}, I_D = 10mA$ $T_J = 175^\circ C$
		-	1	10	μA	$V_{DS} = 1500V, V_{GS} = 0V$
I_{DSS}	Zero gate voltage drain current	-	1	10	μA	$V_{DS} = 1500V, V_{GS} = 0V$
I_{GSS}	Gate source leakage current	-	-	100	nA	$V_{GS} = 18V, V_{DS} = 0V$
$R_{DS(on)}$	Current drain-source on-state					

Fig.11

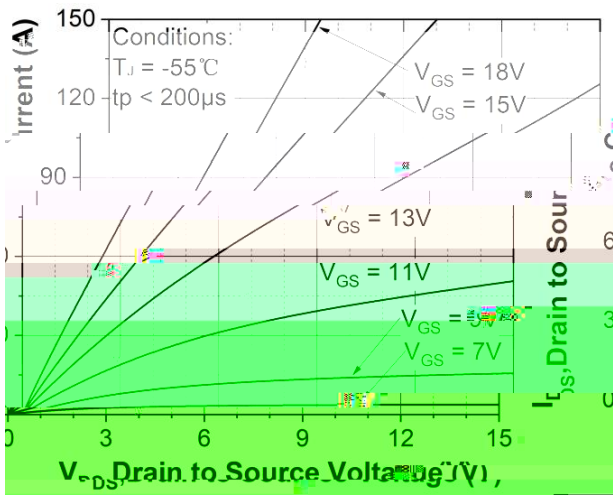


Figure 1. Output characteristics $T_J = -55^\circ\text{C}$

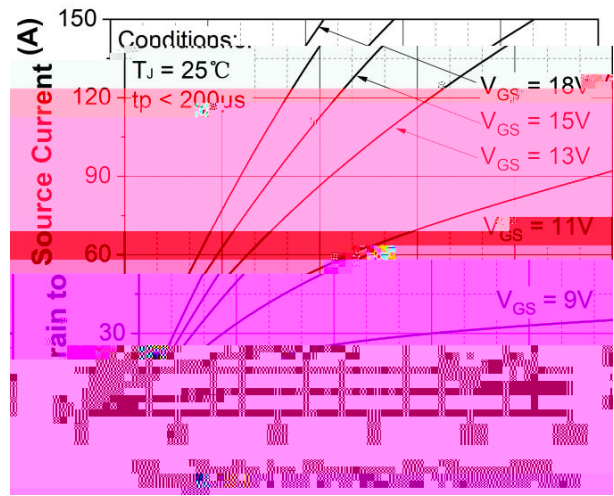


Figure 2. Output characteristics $T_J = 25^\circ\text{C}$

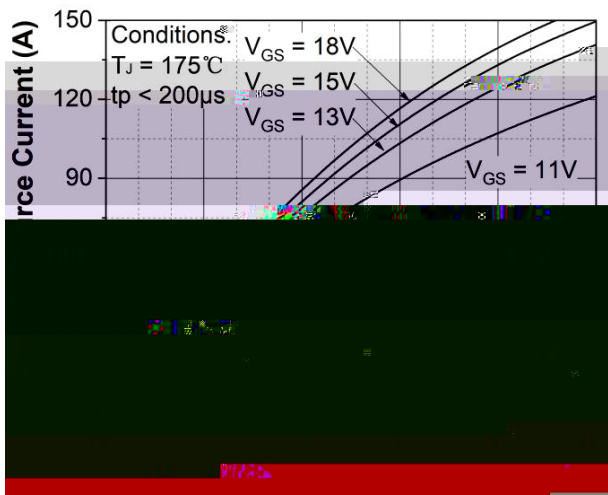


Figure 3. Output characteristics $T_J = 175^\circ\text{C}$

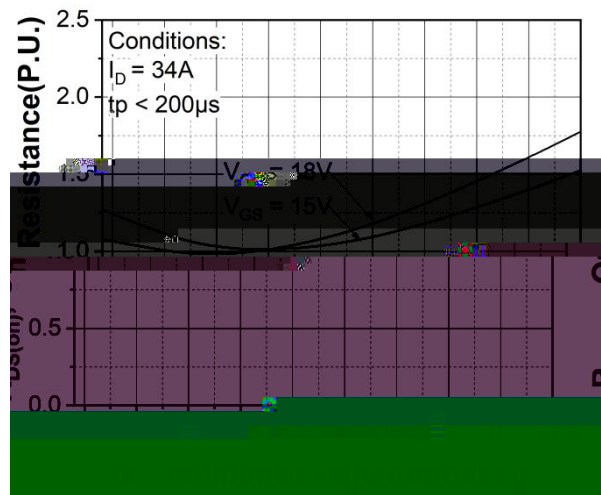


Figure 4. Normalized on-resistance vs. temperature

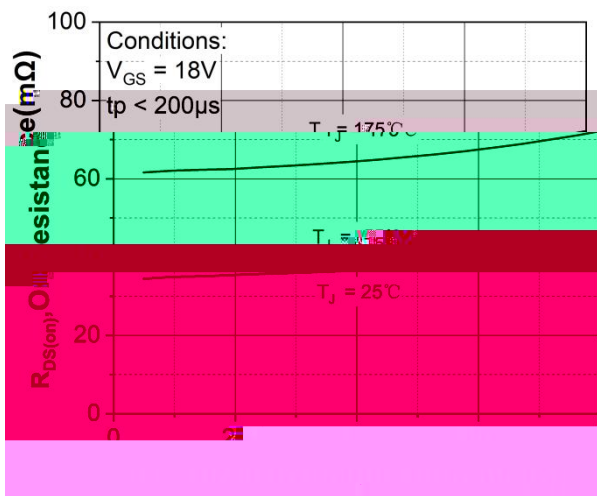


Figure 5. On-resistance vs. drain current for various temperatures

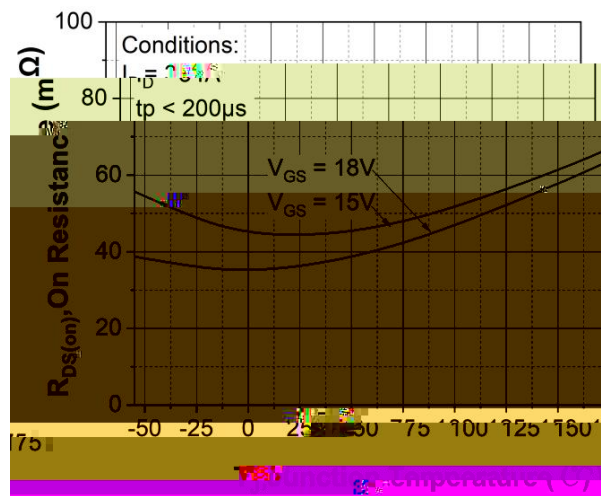


Figure 6. On-resistance vs. temperature for various gate voltages

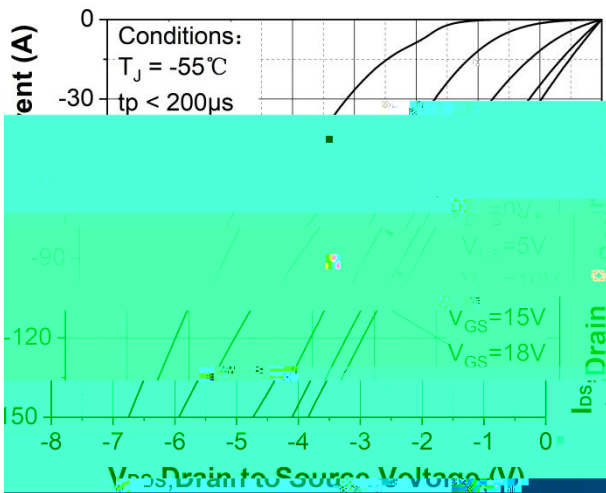


Figure 13. 3rd quadrant characteristic at $T_j = -55^\circ\text{C}$

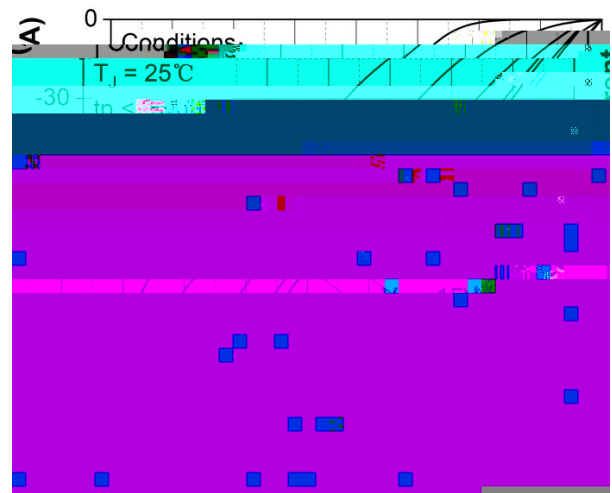


Figure 14. 3rd quadrant characteristic at $T_j = 25^\circ\text{C}$

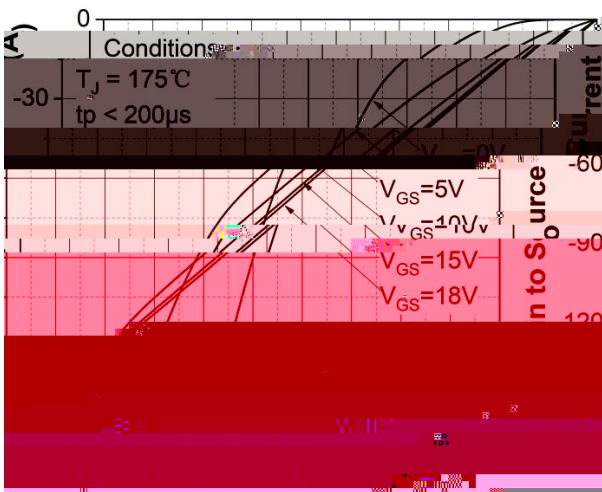


Figure 15. 3rd quadrant characteristic at $T_j = 175^\circ\text{C}$

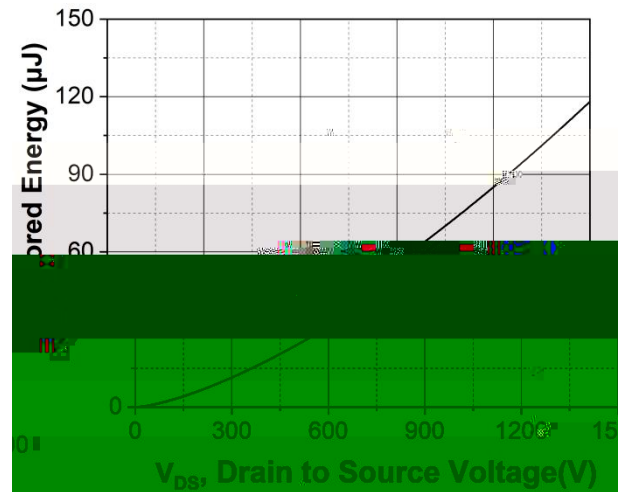


Figure 16. Output capacitor stored energy

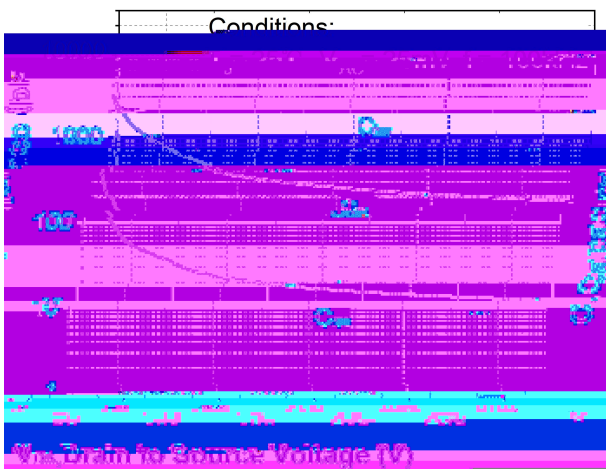


Figure 17. Capacitances vs. drain-source voltage (0 - 250V)

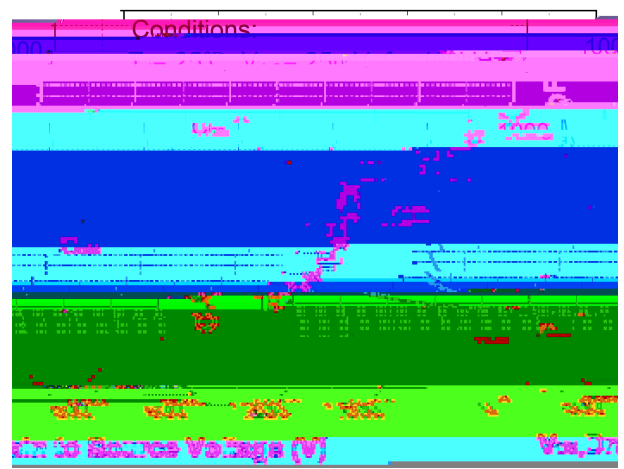


Figure 18. Capacitances vs. drain-source voltage (0 - 1500V)

7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.