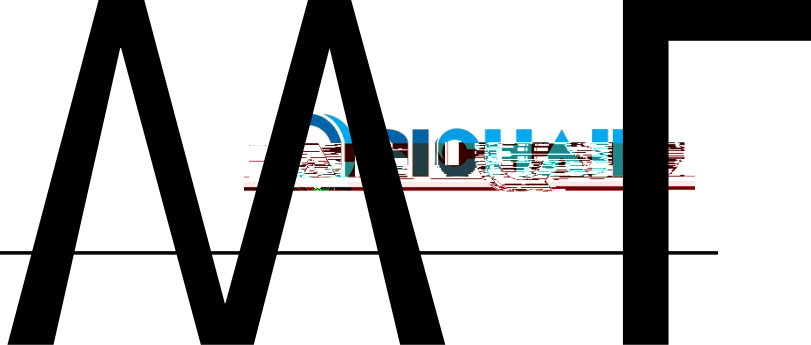


995





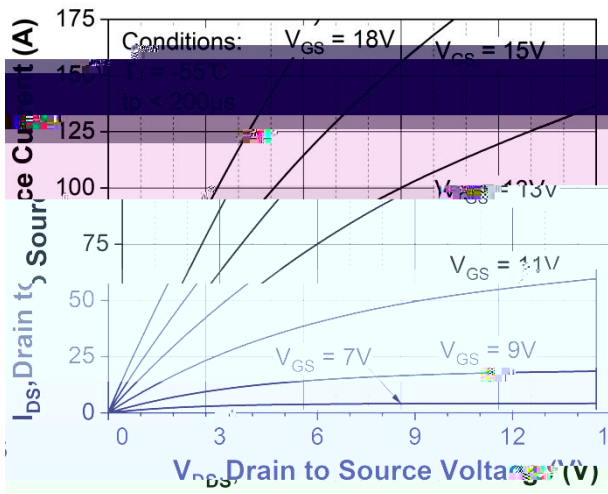


Figure 1. Output characteristics $T_J = -55^\circ\text{C}$

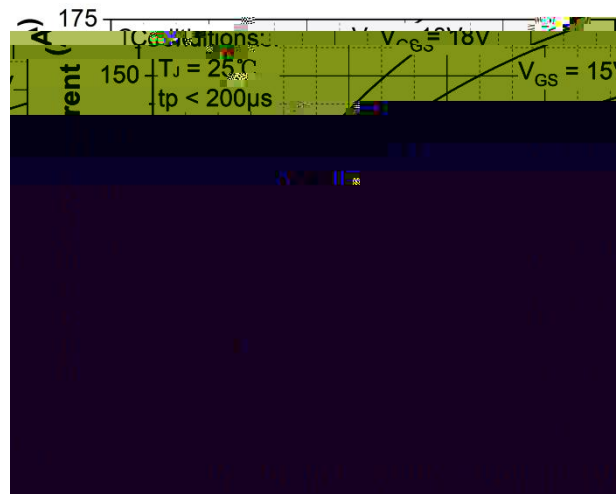


Figure 2. Output characteristics $T_J = 25^\circ\text{C}$

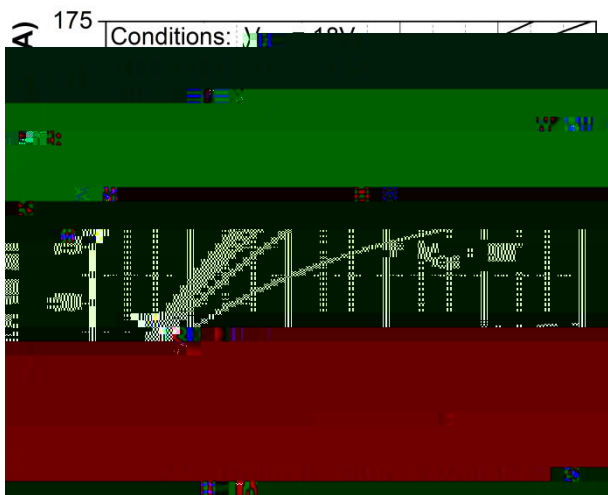


Figure 3. Output characteristics $T_J = 175^\circ\text{C}$

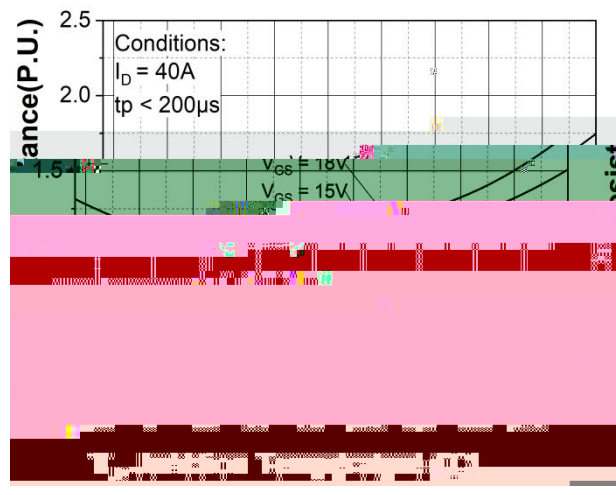


Figure 4. Normalized on-resistance vs. temperature

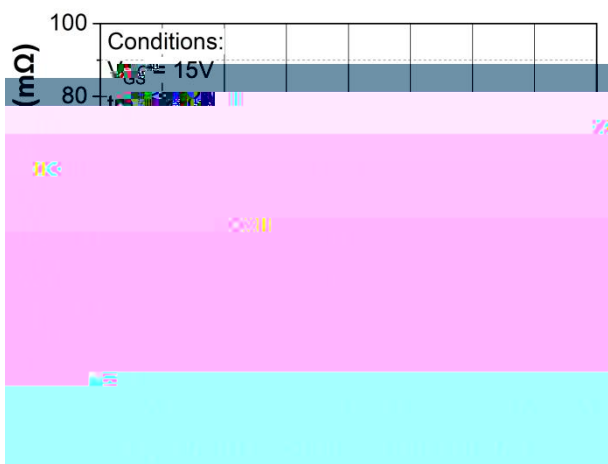


Figure 5. On-resistance vs. drain current for various temperatures

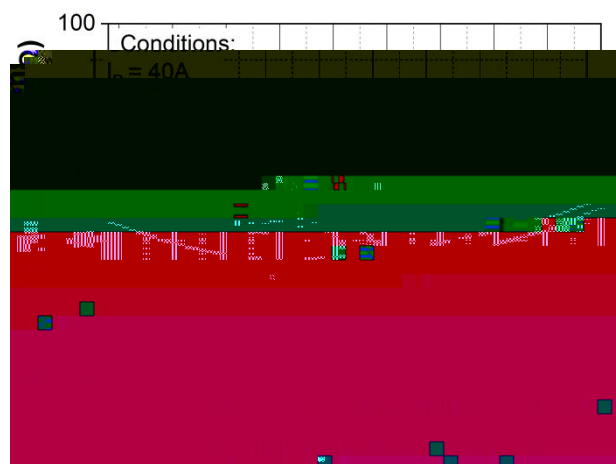


Figure 6. On-resistance vs. temperature for various gate voltage

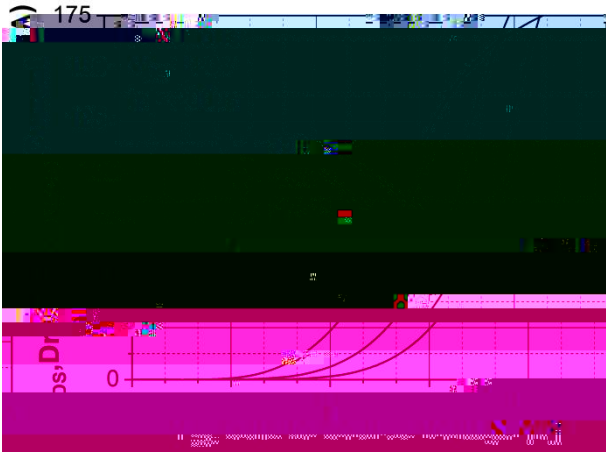


Figure 7. Transfer characteristic for various junction temperatures

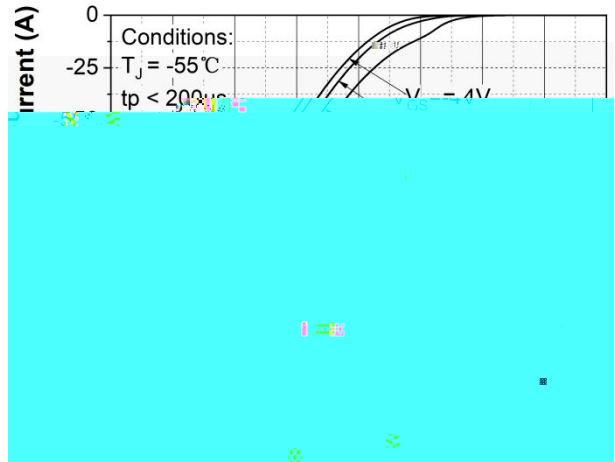


Figure 8. Body diode characteristic at $T_J = -55\text{ }^\circ\text{C}$

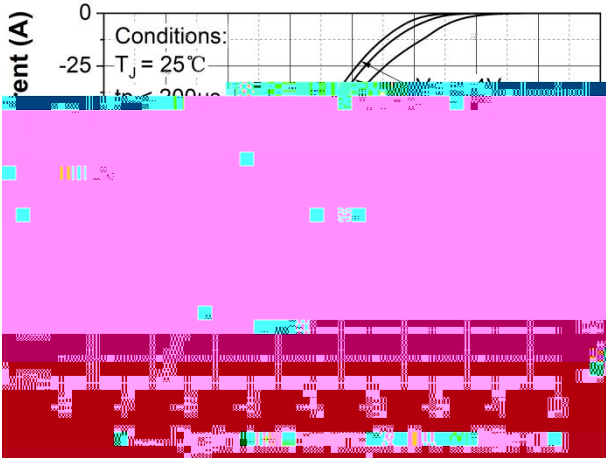


Figure 9. Body diode characteristic at $T_J = 25\text{ }^\circ\text{C}$

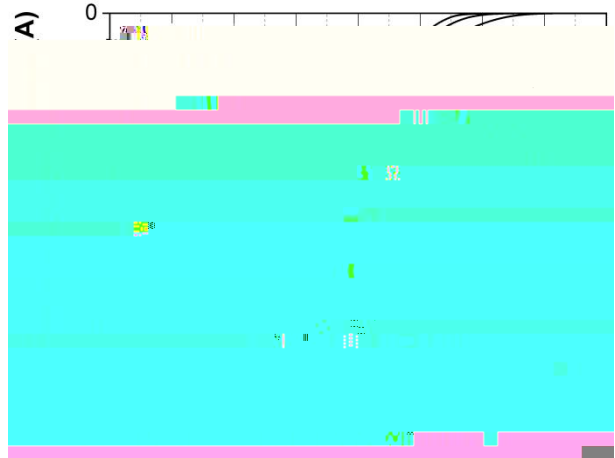


Figure 10. Body diode characteristic at $T_J = 175\text{ }^\circ\text{C}$

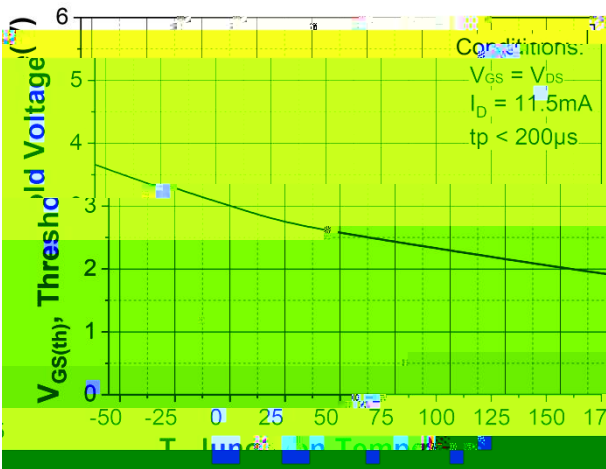


Figure 11. Threshold voltage vs. temperature

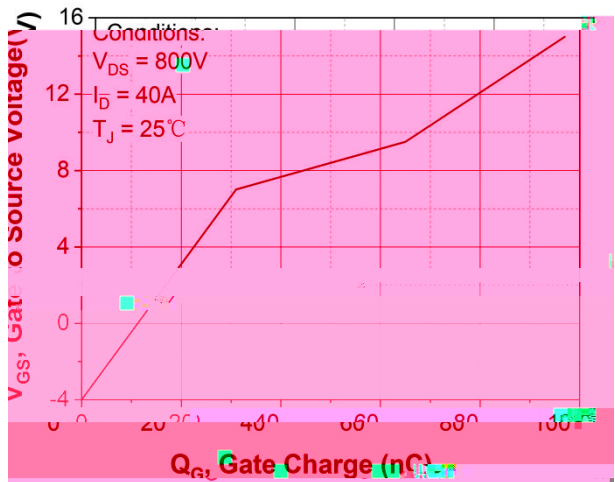


Figure 12. Gate charge characteristic

Die size W x L	4.986 * 3.74	mm	
Gate pad size W x L	0.8 * 0.8	mm	
Die thickness	200	μm	
Top side source gate metallization	4	μm	Ti/Al
Back side drain metallization	1	μm	Ti/Ni/Ag

Symbol	Dimension / mm
B	3.740
b1	0.800
b2	0.900
b3	0.950
b4	0.900
A	4.986
a1	0.800



5. Specifications of any and all products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment.
6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.
7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.
8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.